


MSTS™

MULTI-SPECTRAL TEST SET

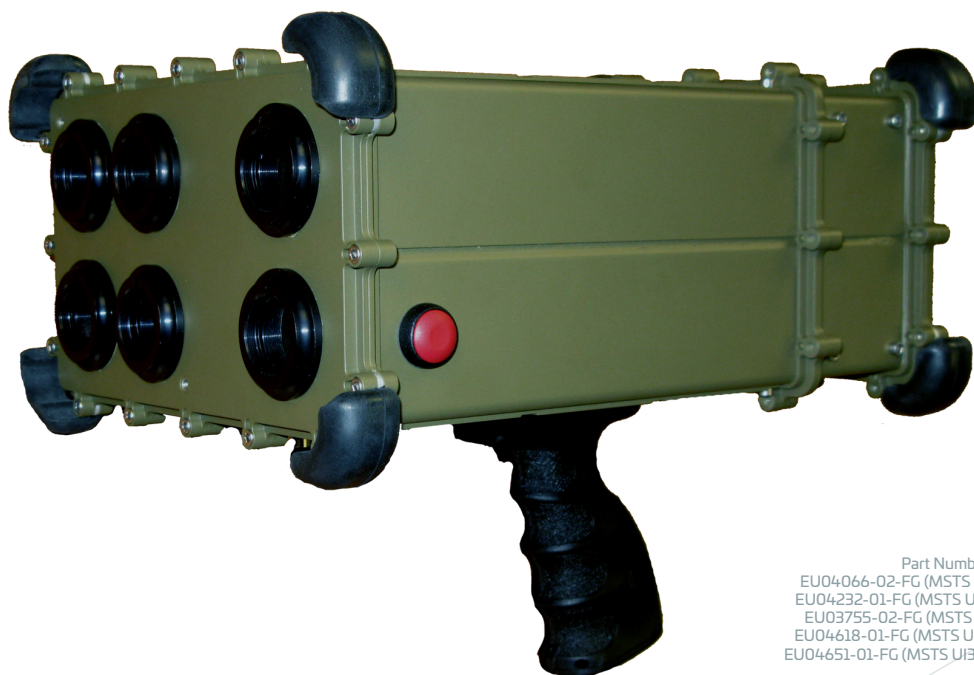

Part Numbers:
EU04066-02-FG (MSTS UD)
EU04232-01-FG (MSTS UDL)
EU03755-02-FG (MSTS UL)
EU04618-01-FG (MSTS UI3L)
EU04651-01-FG (MSTS UI3DL)

TEST, TRAINING & SIMULATION

GO/NO-GO TESTING

Following more than 25 years of individual flight-line test equipment designs (> 2,000 test sets in 19 different countries), Textron Systems Electronic Systems (TSES) now offers a combined test set that provides an integrated solution for all flight line stimulation requirements. The user definable MSTS provides multiple threat and detection channels to enable comprehensive testing of modern multi sensor electro-optic/infrared (EO/IR) aircraft survivability equipment (ASE) designs. Threats may be individual, sequential or staggered to offer realistic test requirements. The MSTS offers the user a choice of UV, 2 colour IR, Laser (LBR, LTD, LRF) and IR detection to cover the complete gamut of today's EO/IR and DIRCM threat environment. By integrating the highly effective threat emitters into a compact and easily portable design, it offers a single cost-effective solution for post maintenance, pre-mission and development requirements. To complement the MSTS, TSES offers a newly designed software suite, Test Program Generator (TPG), to allow a user full threat development, loading, remote control and firing capabilities.

TextronSystems.com



TEXTRON Systems

► PUSHING PAST POSSIBLE

MULTI-SPECTRAL TEST SET (MSTS)

SYSTEM PERFORMANCE



**TYPICAL
OPERATING RANGE**
5 m - 100 m
(configuration
dependant) 5 m - 30 m
(typical)




**EXTERNAL
CONNECTION**
Serial port providing
ethernet and remote
trigger



**MOUNTING
CONFIGURATION**
Handheld or
monopod/tripod (not
supplied)



POWER
Removable lithium
rechargeable
battery 12 VDC
external input



DIMENSIONS
225 (w) x 190
(H) x 300 (L) mm
(excluding handle)



**MEMORY MEDIA
TYPE**
Removable Memory
Media



**GUI USER
INTERFACE**
Sunlight readable
LCD display



**NUMBER OF
TEST PROFILE
LIBRARIES**
> 100



**MAXIMUM
PROFILE LENGTH**
32 sec



AIMING
Optical sight with
optional IR sight



BATTERY LIFE
> 200 engagement
operations



**STANDARD
COLOR**
NATO green



WEIGHT
< 4 kg/9 lb

LABORATORY, DEPOT, AND FLIGHT-LINE TESTING

- > Combined EO/IR Emitters/
Detection
- > Simultaneous, individual, or
sequential ASE test emissions
- > Upgradable functions from
baseline purchase
- > End-to-end DIRCM confidence test
 - Jam code & irradiance
- > UV and IR Missile Warning System
test
 - Hostile fire muzzle flash and missile plume
- > Laser Warning Receiver test
 - 0.905 and 1.54 microns
 - Laser Range Finder, Laser
Designator and Laser Beam Rider
- > IR Jammer